



EMC TEST REPORT For VCCI

Test Report No. : KES-E1-18T0636

Date of Issue : Nov. 16, 2018

Product name : Thermal Camera

Model/Type No. : TNO-4040TR

Variant Model : TNO-4030TR

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Date of Receipt : Nov. 06, 2018

Test date : Nov. 08, 2018

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Kang Hyeon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0636
Page (2) of (41)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 16, 2018	KES-E1-18T0636	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Sep be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	7
1.8	Configuration.....	7
1.9	Remarks when standards applied	9
1.10	Calibration Details of Equipment Used for Measurement.....	9
1.11	Test Facility	9
1.12	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions Mains Power Ports.....	12
2.2	Conducted Emissions at Telecommunication Ports.....	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		16
Conducted Emissions at Mains Power Ports.....		16
Conducted Emissions at Telecommunication Ports		18
Radiated Electric Field Emissions(Below 1 GHz)		24
Radiated Electric Field Emissions(Above 1 GHz)		26
Test Setup Photos and Configuration		28
Conducted Voltage Emissions		28
Conducted Telecommunication Emissions		29
Radiated Electric Field Emissions(Below 1 GHz)		30
Radiated Electric Field Emissions(Above 1 GHz)		31
EUT External Photographs		32
EUT Internal Photographs		33



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (4) of (41)

1.0 General Product Description

Main Specifications of EUT are:

VIDEO	
Imaging Device	Uncooled microbolometer, Pixel size : 17 μ m
Effective Pixels	640(H) x 480(V)
NETD	<50mK
Video Out	CVBS : 1.0Vpp / 75 Ω composite, 720 x 480(N), 720 x 576(P), for installation USB : Micro USB type B, 1280 x 720, for installation
LENS	
Focal Length (Zoom Ratio)	19mm fixed
Max. Aperture Ratio	F1.0
Angular Field of View	H : 32° / V : 24.3° / D : 39.2°
Min. Object Distance	11m (36.09ft)
Focus Control	Fixed
Lens / Mount Type	Board-In type
OPERATIONAL	
Camera Title	Off / On - W/W : English / Numeric / Special characters - China : English / Numeric / Special / Chinese characters - Common : Multi-line (Max. 5), Color (Gray / Green / Red / Blue / Black / White), Transparency, Auto scale by resolution
Motion Detection	Off / On (8ea, 8point polygonal zones), Handover
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Gray / Green / Red / Blue / Black / White - Mosaic
Flip / Mirror	Off / On, Hallway : 90° / 270°
Video & Audio Analytics	Tampering, Loitering, Directional detection, Virtual line, Enter/Exit, (Dis) Appear, Audio detection, Motion detection, Sound classification, Shock detection, Temperature change detection
Alarm I/O	Input 1ea / Output 2ea
Digital Image Stabilization	Off / On (Built-in Gyro sensor)
Alarm Triggers	Alarm input, Motion detection, Video & Audio analytics, Network disconnect
Alarm Events	File upload Via FTP, E-mail, Notification Via E-mail, Local storage (SD/SDHC/ SDXC) or NAS recording at event triggers, External output
Pixel count	Support
NETWORK	
Ethernet	RJ-45 (10/100 BASE-T)
Video Compression Format	H.265 / H.264 (MPEG-4 part 10/AVC) : Main / Baseline / High, MJPEG
Resolution	640 x 480, 640 x 360, 320 x 240
Max. Framerate	H.265 / H.264 : Max. 30fps at all resolutions, MJPEG : Max. 30fps
WiseStreamII	Support
Video Quality Adjustment	H.265 / H.264 / MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.265 / H.264 : CBR or VBR, MJPEG : VBR
Streaming Capability	Multiple streaming (Up to 10 profiles)
Audio In	Selectable (Mic in / Line in), Supply voltage : 2.5V DC (4mA), Input impedance : approx. 2K Ohm
Audio Out	Line out, Max output level : 1 Vrms
Audio Compression Format	G.711 u-law / G.726 selectable, G.726 (ADPCM) 8KHz, G.711 8KHz, G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps, AAC-LC : 48Kbps at 8 / 16 / 32 / 48KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTCP/RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3 (MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 100 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

A derivative model to the classification of customers simple.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Thermal Camera	TNO-4040TR	-	Hanwha Techwin (Tianjin) Co.,Ltd.	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adaptor	PD-9601GR	-	Microsemi	-
Notebook	ProBook4430s	-	HP	-
Notebook Adaptor	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD.	-
Speaker	BR1000A	-	DONGGUAN 1 TECHNOLOGY Co., Ltd	-
MIC	MP1000	-	-	-
Alarm	-	-	-	-
Button Alarm	-	-	-	-
iPod	A1367	C3TDG2JGDCP9	APPLE .Inc	-
Micro SD Card	-	-	SanDisk	8 GB

1.6 External I/O Cabling

■ AC 24 V, DC 12 V MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Thermal Camera (EUT)	RJ-45	Notebook	RJ-45	3.0	U
	Thermal 2Pin	Speaker	3.5 mm	1.4	U
	Thermal 2Pin	MIC	3.5 mm	1.4	U
	Thermal 2Pin	Alarm	Thermal 2Pin	3.0	U
	Thermal 2Pin	Button Alarm	Thermal 2Pin	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	iPod	3.5 mm	0.8	U

■ PoE MODE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Thermal Camera (EUT)	RJ-45 (PoE)	PoE Adaptor	RJ-45 (PoE)	3.0	U
	Thermal 2Pin	Speaker	3.5 mm	1.4	U
	Thermal 2Pin	MIC	3.5 mm	1.4	U
	Thermal 2Pin	Alarm	Thermal 2Pin	3.0	U
	Thermal 2Pin	Button Alarm	Thermal 2Pin	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	RJ-45 (DATA)	PoE Adaptor	RJ-45 (DATA)	1.5	U
	3.5 mm	iPod	3.5 mm	0.8	U


* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test mode	operating
AC 24 V DC 12 V PoE	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Techwin Co., Ltd.


1.8 Configuration

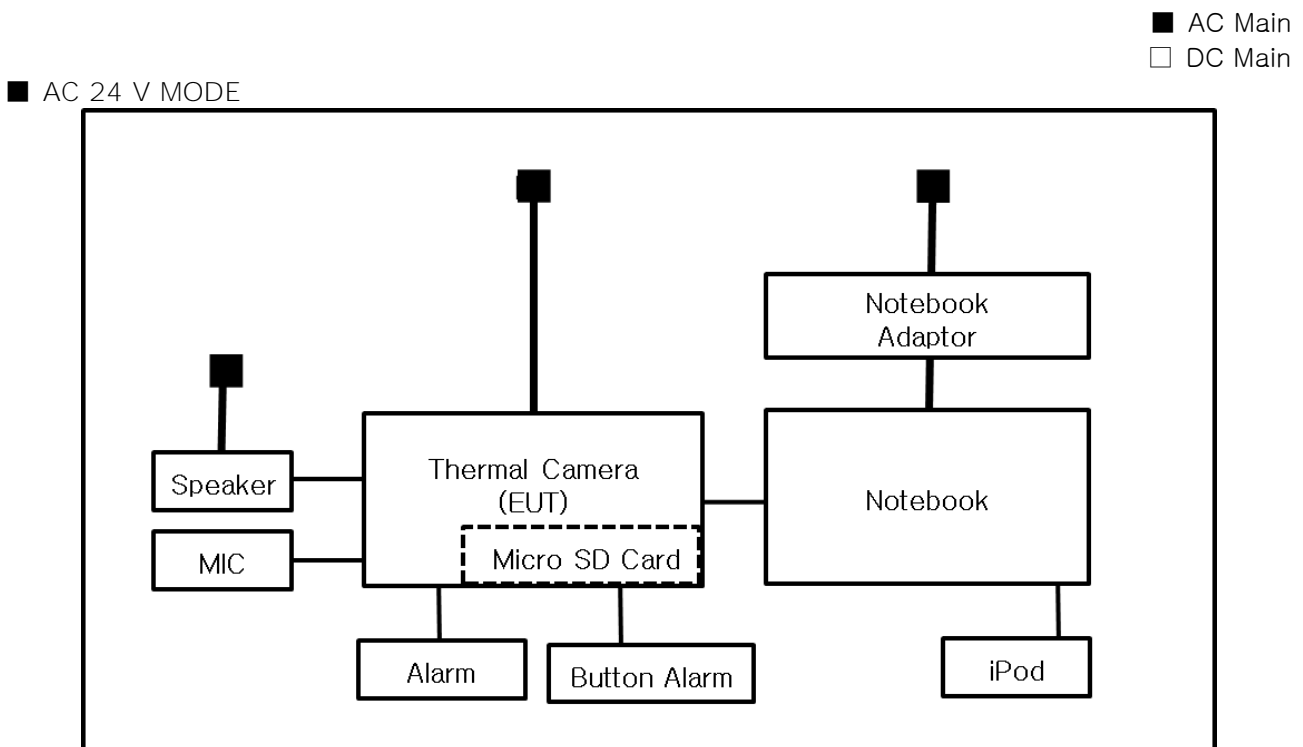

■ DC 12 V MODE

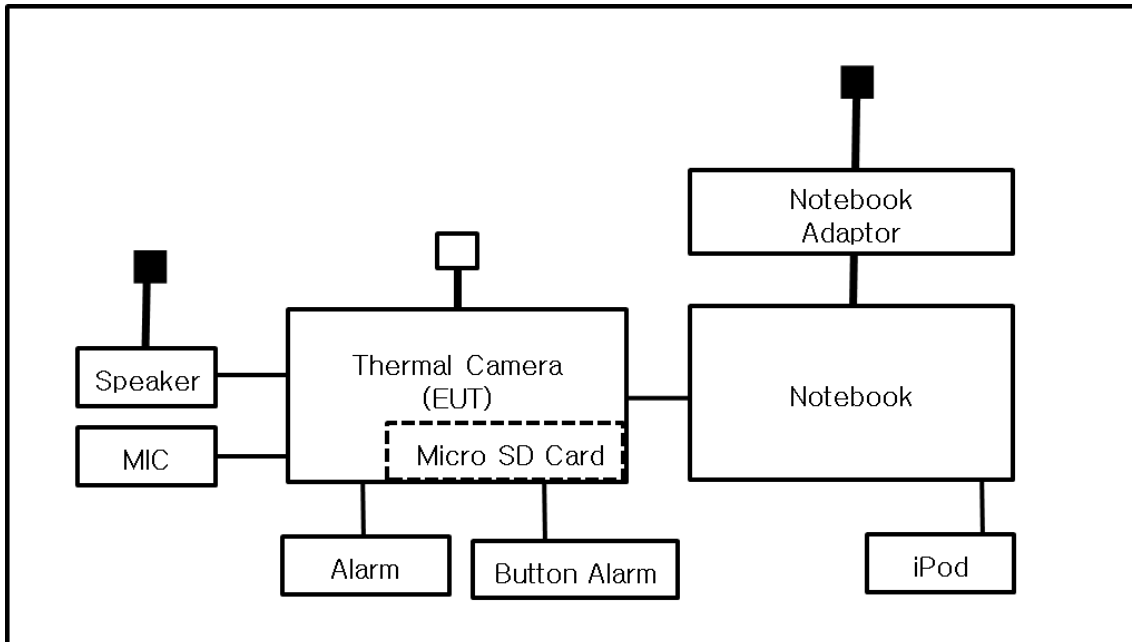

■ PoE MODE

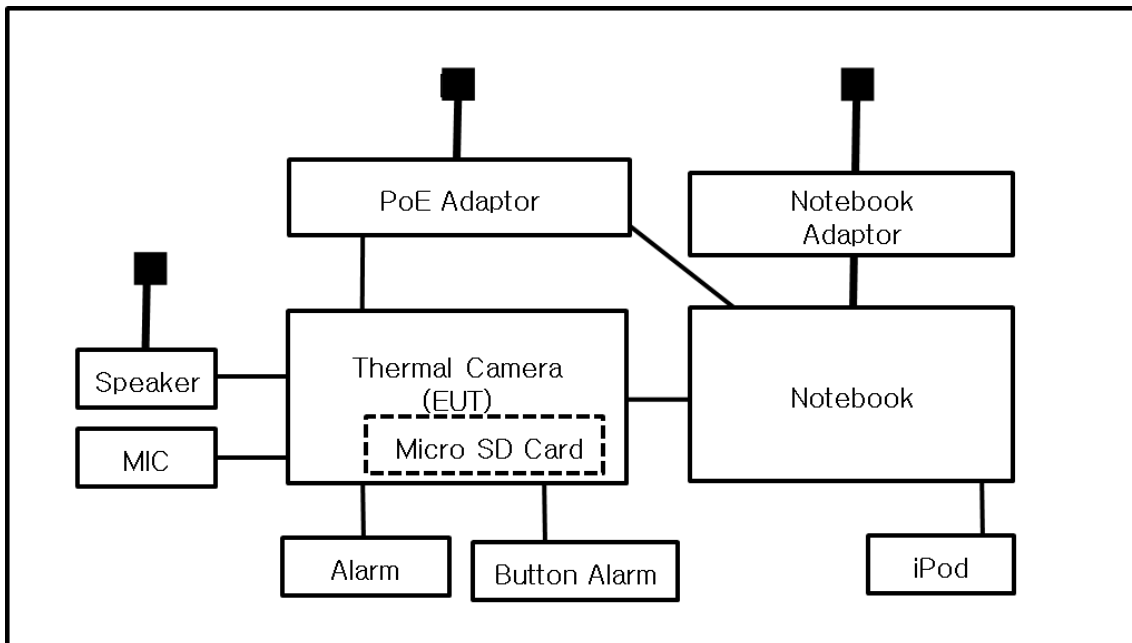

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4: 2014 and CISPR 16-1-4: 2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ EMC – Directive 2014/30/EU

☐ EN 61000-6-3: 2011

☐ EN 61000-6-1: 2007

☐ EN 61000-6-4: 2007 +A1: 2011

☐ EN 61000-6-2: 2005

☐ EN 55011: 2007 +A1: 2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1: 2006 +A2: 2011

☐ EN 55014-2: 1997 +A2: 2008

☐ EN 55015: 2013

☐ EN 61547 : 2009

☐ EN 55032: 2015

☐ Class A

☐ Class B

☐ EN 55024: 2010 +A1: 2015

☐ EN 50130-4: 2011 +A1: 2014

☐ EN 61000-3-2: 2014

☐ EN 61000-3-3: 2013

☐ EN 61326-1: 2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (11) of (41)

-
- | | | |
|--|---|----------------------------------|
| <input checked="" type="checkbox"/> VCCI - CISPR 32:2016 | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> AS/NZS CISPR22:2009 + A1:2010 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> 47 CFR Part 15, Subpart B | | |
| <input type="checkbox"/> CISPR 22:2009 + A1:2010 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009 | | |
| <input type="checkbox"/> IC Regulation ICES-003 : 2016 | | |
| <input type="checkbox"/> CAN/CSA CISPR 22-10 | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014 | | |
|
 | | |
| <input type="checkbox"/> RE- Directive 2014/53/EU | | |
|
 | | |
| <input type="checkbox"/> EN 301 489-1 V1.9.2 | | |
| <input type="checkbox"/> Equipment for fixed use | | |
| <input type="checkbox"/> Equipment for vehicular use | | |
| <input type="checkbox"/> Equipment for portable use | | |
| <input type="checkbox"/> EN 301 489-3 V1.6.1 | | |
| <input type="checkbox"/> EN 301 489-17 V2.2.1 | | |
| <input type="checkbox"/> EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (12) of (41)

2.1 Conducted Emissions Mains Power Ports

Test Date
Nov. 08, 2018

Test Location
Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	04, 25, 2019
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101137	01, 31, 2019
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101786	04, 25, 2019

Test Conditions
Temperature: 22,4 °C
Relative Humidity: 54,1 % R.H.

Frequency Range of Measurement
150 kHz to 30 MHz

Instrument Settings
IF Band Width: 9 kHz

Test Results
The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date
Nov. 08, 2018

Test Location
Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	04, 25, 2019
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101137	01, 31, 2019
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101786	04, 25, 2019
<input checked="" type="checkbox"/>	8-WIRE ISN CAT3	CAT3 8158	SCHWARZBECK	8158-0019	03, 22, 2019
<input checked="" type="checkbox"/>	8-WIRE ISN CAT5	CAT5 8158	SCHWARZBECK	8158-0030	03, 22, 2019

Test Conditions
Temperature: 22,4 °C
Relative Humidity: 54,1 % R.H.

Frequency Range of Measurement
150 kHz to 30 MHz

Instrument Settings
IF Band Width: 9 kHz

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (14) of (41)

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date
Nov. 08, 2018

Test Location
☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 28, 2018

Test Conditions
Temperature: 21,4 °C
Relative Humidity: 54,1 % R.H.

Frequency Range of Measurement
30 MHz to 1 GHz

Instrument Settings
IF Band Width: 120 kHz

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (15) of (41)

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date
Nov. 08, 2018

Test Location
SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2019
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2019
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 21, 2019
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 02, 2019

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 54,0 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC 24 V MODE

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: TNO-4040TR
Mode: AC
Operator Name: KES

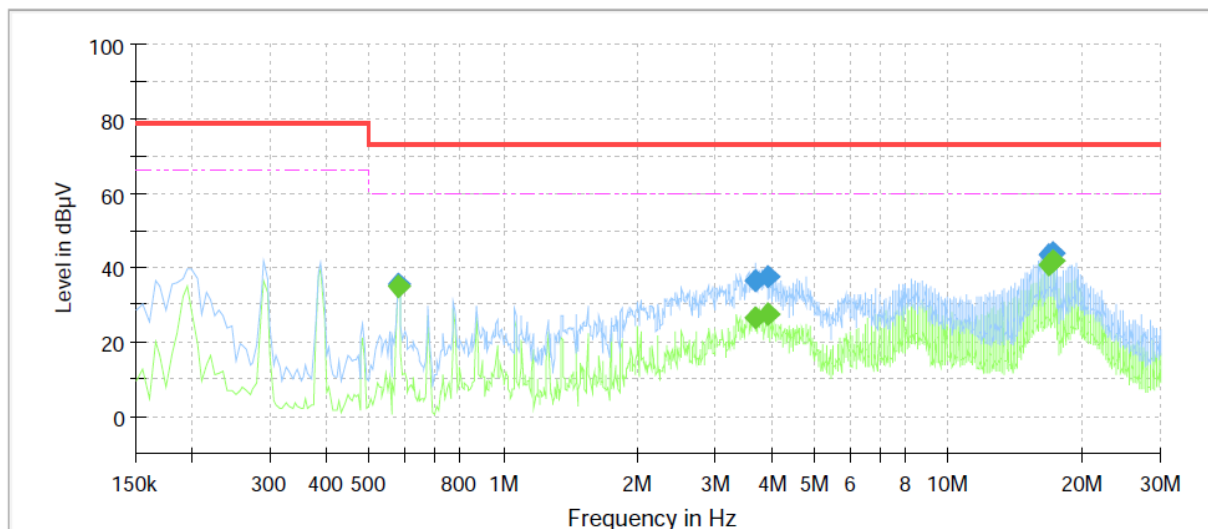


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.580000	---	35.08	60.00	24.92	1000.0	9.000	L1	9.8
0.580000	35.25	---	73.00	37.75	1000.0	9.000	L1	9.8
3.680000	---	26.72	60.00	33.28	1000.0	9.000	L1	10.1
3.680000	36.71	---	73.00	36.29	1000.0	9.000	L1	10.1
3.925000	---	27.53	60.00	32.47	1000.0	9.000	L1	10.1
3.925000	37.50	---	73.00	35.50	1000.0	9.000	L1	10.1
16.875000	---	40.87	60.00	19.13	1000.0	9.000	L1	10.3
16.875000	43.20	---	73.00	29.80	1000.0	9.000	L1	10.3
17.265000	---	41.74	60.00	18.26	1000.0	9.000	L1	10.3
17.265000	43.97	---	73.00	29.03	1000.0	9.000	L1	10.3

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: TNO-4040TR
Mode: AC
Operator Name: KES

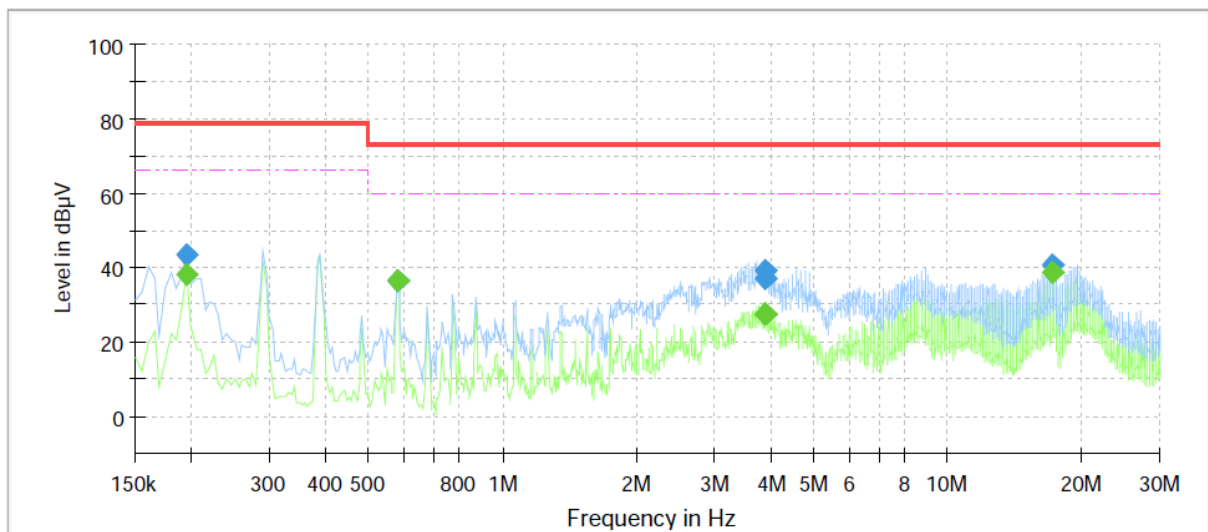

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.195000	---	38.06	66.00	27.94	1000.0	9.000	N	9.7
0.195000	43.60	---	79.00	35.40	1000.0	9.000	N	9.7
0.580000	---	36.30	60.00	23.70	1000.0	9.000	N	9.8
0.580000	36.44	---	73.00	36.56	1000.0	9.000	N	9.8
3.875000	---	27.77	60.00	32.23	1000.0	9.000	N	10.1
3.875000	37.31	---	73.00	35.69	1000.0	9.000	N	10.1
3.910000	---	27.65	60.00	32.35	1000.0	9.000	N	10.1
3.910000	39.09	---	73.00	33.91	1000.0	9.000	N	10.1
17.165000	---	38.44	60.00	21.56	1000.0	9.000	N	10.2
17.165000	40.52	---	73.00	32.48	1000.0	9.000	N	10.2

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


Conducted Emissions at Telecommunication Ports

■ AC 24 V MODE

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	TNO-4040TR
Mode	AC 10
Operator Name:	KES

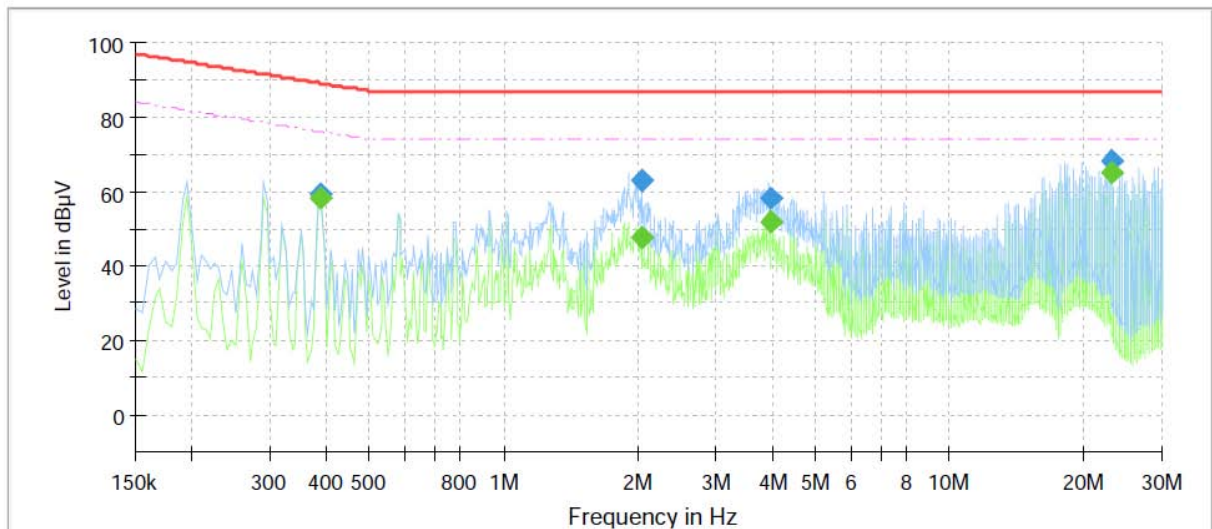

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.390000	---	58.15	76.06	17.91	1000.0	9.000	Single Line	10.1
0.390000	59.30	---	89.06	29.76	1000.0	9.000	Single Line	10.1
2.040000	---	47.79	74.00	26.21	1000.0	9.000	Single Line	10.3
2.040000	62.86	---	87.00	24.14	1000.0	9.000	Single Line	10.3
3.955000	---	52.05	74.00	21.95	1000.0	9.000	Single Line	10.2
3.955000	58.03	---	87.00	28.97	1000.0	9.000	Single Line	10.2
23.130000	---	64.87	74.00	9.13	1000.0	9.000	Single Line	10.1
23.130000	68.30	---	87.00	18.70	1000.0	9.000	Single Line	10.1



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (19) of (41)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4040TR
Mode: AC 100
Operator Name: KES

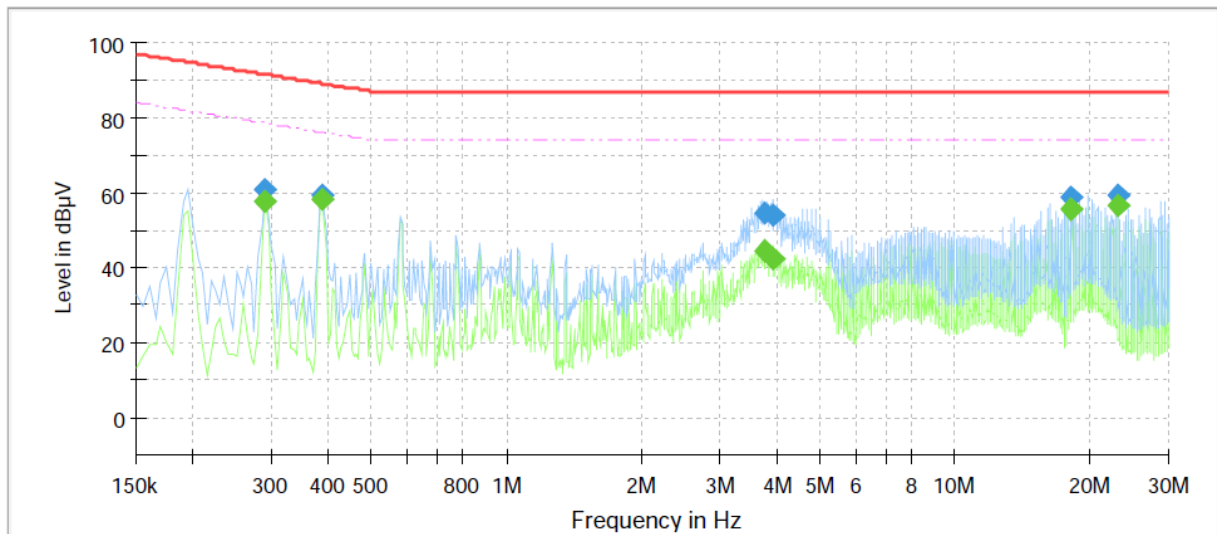

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.290000	---	57.48	78.52	21.04	1000.0	9.000	Single Line	9.6
0.290000	60.76	---	91.52	30.76	1000.0	9.000	Single Line	9.6
0.390000	---	58.06	76.06	18.00	1000.0	9.000	Single Line	9.6
0.390000	59.13	---	89.06	29.93	1000.0	9.000	Single Line	9.6
3.775000	---	44.25	74.00	29.75	1000.0	9.000	Single Line	9.7
3.775000	54.28	---	87.00	32.72	1000.0	9.000	Single Line	9.7
3.915000	---	42.27	74.00	31.73	1000.0	9.000	Single Line	9.7
3.915000	54.08	---	87.00	32.92	1000.0	9.000	Single Line	9.7
18.245000	---	55.40	74.00	18.60	1000.0	9.000	Single Line	9.7
18.245000	58.66	---	87.00	28.34	1000.0	9.000	Single Line	9.7
23.130000	---	56.53	74.00	17.47	1000.0	9.000	Single Line	9.6
23.130000	59.46	---	87.00	27.54	1000.0	9.000	Single Line	9.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (20) of (41)

■ DC 12 V MODE

[10 Mbps]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Telecommunication Emission

TNO-4040TR

DC 10

KES

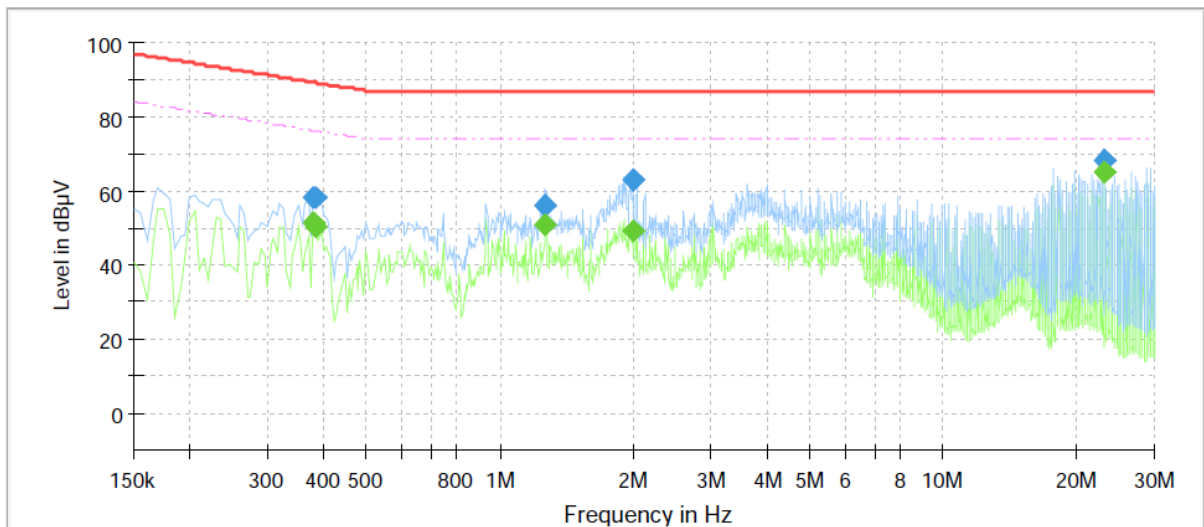

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.380000	---	51.27	76.28	25.01	1000.0	9.000	Single Line	10.1
0.380000	58.27	---	89.28	31.01	1000.0	9.000	Single Line	10.1
0.385000	---	50.13	76.17	26.04	1000.0	9.000	Single Line	10.1
0.385000	58.05	---	89.17	31.12	1000.0	9.000	Single Line	10.1
1.265000	---	50.82	74.00	23.18	1000.0	9.000	Single Line	10.3
1.265000	55.86	---	87.00	31.14	1000.0	9.000	Single Line	10.3
1.995000	---	49.47	74.00	24.53	1000.0	9.000	Single Line	10.3
1.995000	63.15	---	87.00	23.85	1000.0	9.000	Single Line	10.3
23.130000	---	64.87	74.00	9.13	1000.0	9.000	Single Line	10.1
23.130000	68.32	---	87.00	18.68	1000.0	9.000	Single Line	10.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (21) of (41)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4040TR
Mode: DC 100
Operator Name: KES

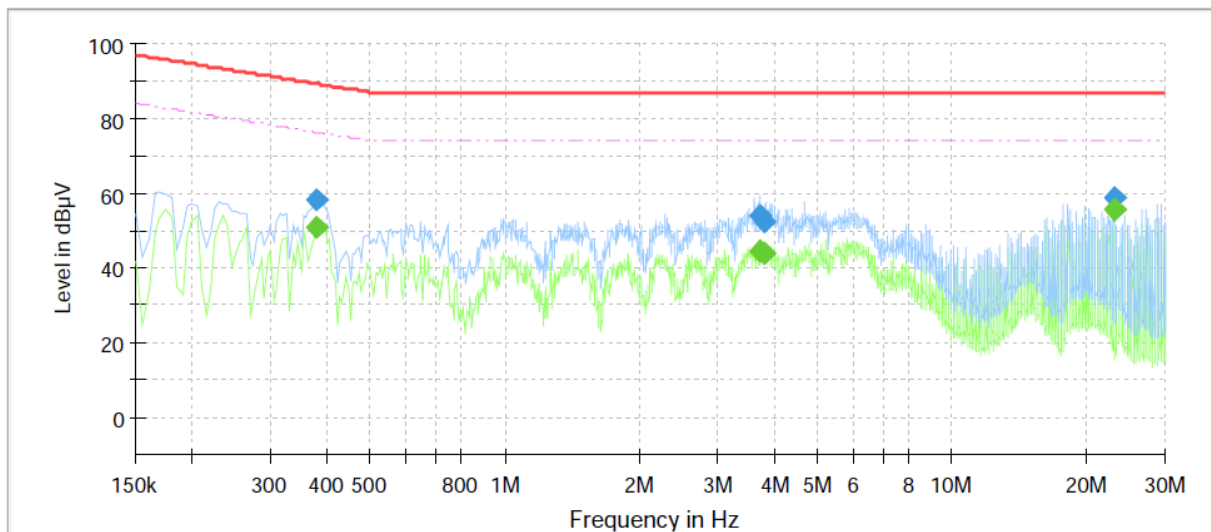

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.380000	---	50.87	76.28	25.41	1000.0	9.000	Single Line	9.6
0.380000	57.96	---	89.28	31.32	1000.0	9.000	Single Line	9.6
3.710000	---	44.35	74.00	29.65	1000.0	9.000	Single Line	9.7
3.710000	53.99	---	87.00	33.01	1000.0	9.000	Single Line	9.7
3.820000	---	43.85	74.00	30.15	1000.0	9.000	Single Line	9.7
3.820000	52.29	---	87.00	34.71	1000.0	9.000	Single Line	9.7
23.130000	---	55.45	74.00	18.55	1000.0	9.000	Single Line	9.6
23.130000	59.01	---	87.00	27.99	1000.0	9.000	Single Line	9.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:
KES-EI-18T0636
Page (22) of (41)

■ PoE MODE

[10 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4040TR
Mode: PoE 10
Operator Name: KES

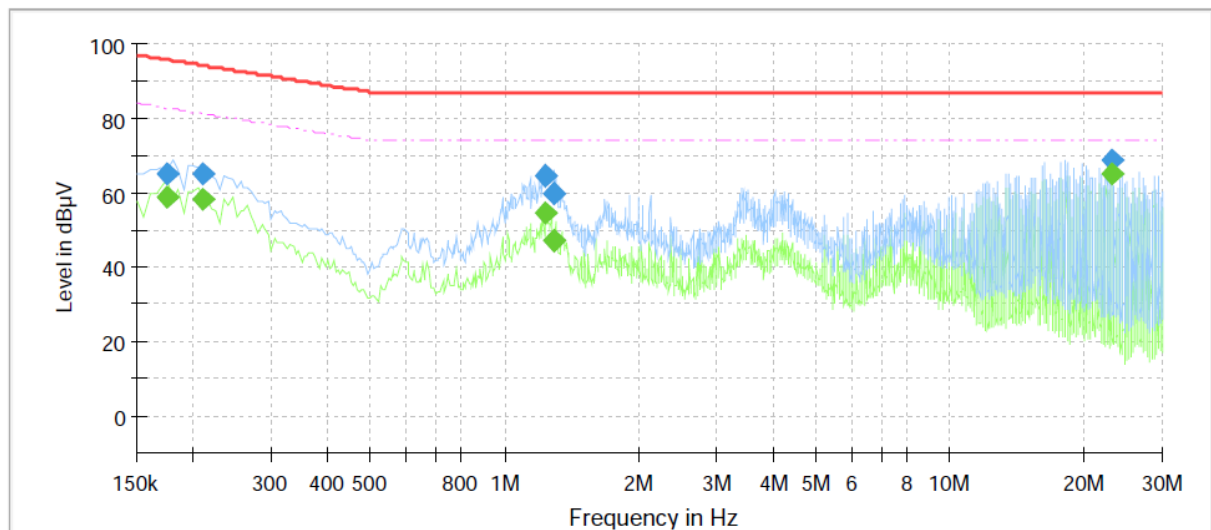

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.175000	---	58.82	82.72	23.90	1000.0	9.000	Single Line	10.2
0.175000	65.03	---	95.72	30.69	1000.0	9.000	Single Line	10.2
0.210000	---	58.19	81.21	23.02	1000.0	9.000	Single Line	10.2
0.210000	65.11	---	94.21	29.10	1000.0	9.000	Single Line	10.2
1.240000	---	54.36	74.00	19.64	1000.0	9.000	Single Line	10.3
1.240000	64.37	---	87.00	22.63	1000.0	9.000	Single Line	10.3
1.285000	---	46.86	74.00	27.14	1000.0	9.000	Single Line	10.3
1.285000	59.77	---	87.00	27.23	1000.0	9.000	Single Line	10.3
23.130000	---	65.33	74.00	8.67	1000.0	9.000	Single Line	10.1
23.130000	68.88	---	87.00	18.12	1000.0	9.000	Single Line	10.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (23) of (41)

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: TNO-4040TR
Mode: PoE 100
Operator Name: KES

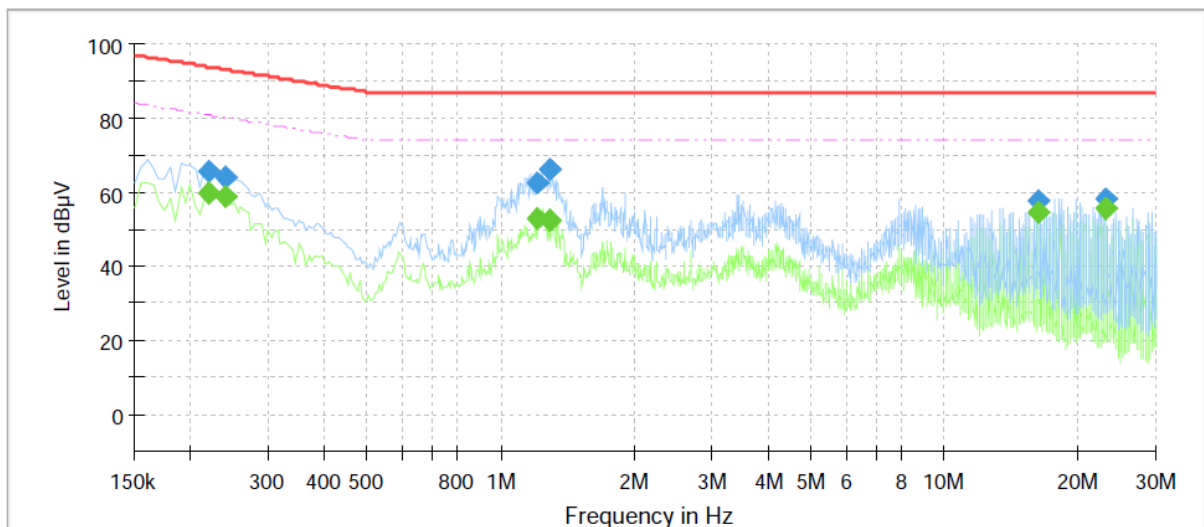

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.220000	---	59.95	80.82	20.87	1000.0	9.000	Single Line	9.6
0.220000	65.59	---	93.82	28.23	1000.0	9.000	Single Line	9.6
0.240000	---	58.57	80.10	21.53	1000.0	9.000	Single Line	9.6
0.240000	63.84	---	93.10	29.26	1000.0	9.000	Single Line	9.6
1.215000	---	53.15	74.00	20.85	1000.0	9.000	Single Line	9.8
1.215000	62.46	---	87.00	24.54	1000.0	9.000	Single Line	9.8
1.295000	---	52.49	74.00	21.51	1000.0	9.000	Single Line	9.8
1.295000	65.89	---	87.00	21.11	1000.0	9.000	Single Line	9.8
16.230000	---	54.46	74.00	19.54	1000.0	9.000	Single Line	9.7
16.230000	57.67	---	87.00	29.33	1000.0	9.000	Single Line	9.7
23.130000	---	55.46	74.00	18.54	1000.0	9.000	Single Line	9.6
23.130000	58.21	---	87.00	28.79	1000.0	9.000	Single Line	9.6

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:

KES-EI-18T0636

Page (24) of (41)

Radiated Electric Field Emissions(Below 1 GHz)


■ AC 12 V MODE

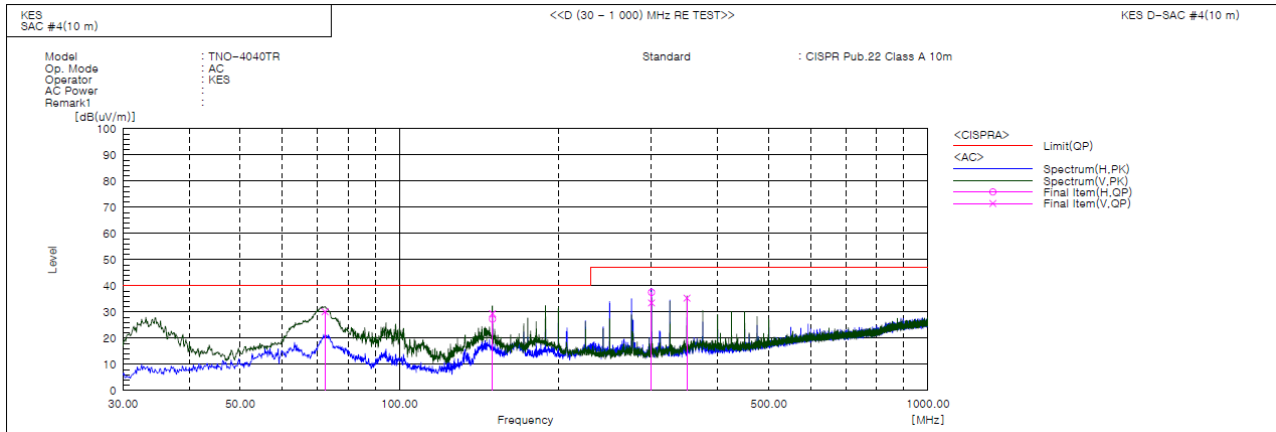

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	72.316	V	63.2	-33.1	30.1	40.0	9.9	100.0	214.0	
2	150.038	H	59.4	-32.1	27.3	40.0	12.7	400.0	124.0	
3	150.038	V	61.5	-32.1	29.4	40.0	10.6	100.0	111.0	
4	300.024	H	62.3	-24.8	37.5	47.0	9.5	400.0	139.0	
5	300.024	V	58.3	-24.8	33.5	47.0	13.5	100.0	91.0	
6	349.979	V	58.5	-23.2	35.3	47.0	11.7	100.0	87.0	

■ DC 12 V MODE

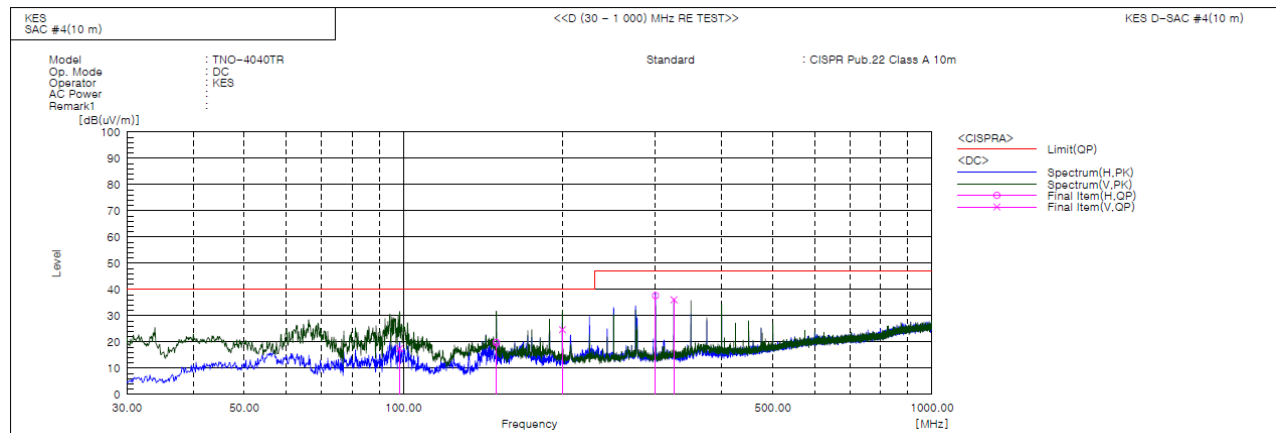

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	98.385	V	46.6	-29.1	17.5	40.0	22.5	100.0	273.0	
2	149.916	H	51.9	-32.1	19.8	40.0	20.2	400.0	119.0	
3	199.993	V	52.2	-27.5	24.7	40.0	15.3	100.0	36.0	
4	300.024	H	62.5	-24.8	37.7	47.0	9.3	400.0	131.0	
5	325.001	V	60.2	-24.1	36.1	47.0	10.9	100.0	147.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-18T0636
Page (25) of (41)

■ PoE MODE

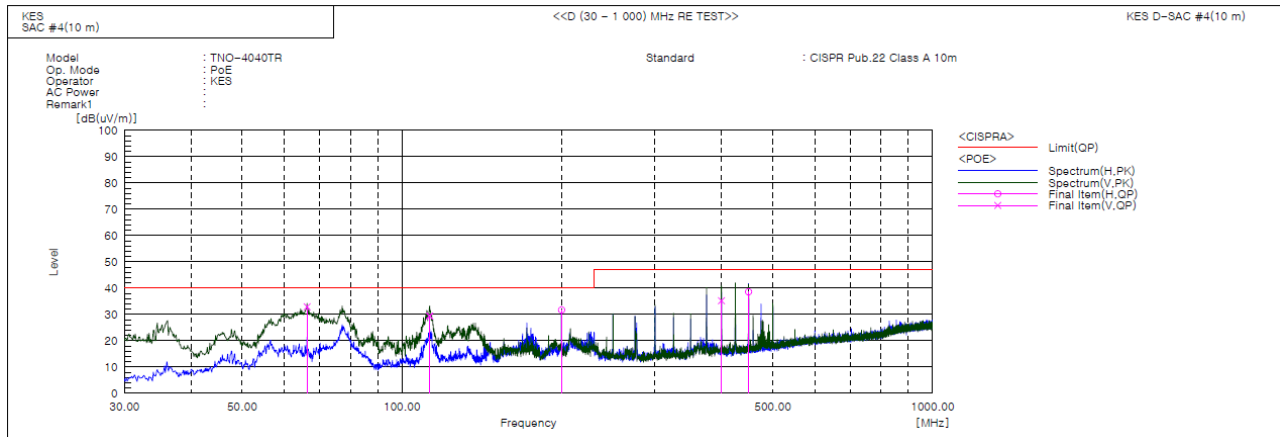

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	66.254	V	64.2	-31.3	32.9	40.0	7.1	100.0	244.0	
2	112.814	V	59.7	-30.3	29.4	40.0	10.6	100.0	113.0	
3	199.993	H	59.2	-27.5	31.7	40.0	8.3	400.0	267.0	
4	400.055	V	56.6	-21.4	35.2	47.0	11.8	100.0	26.0	
5	450.010	H	58.8	-20.2	38.6	47.0	8.4	400.0	282.0	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Test report No.:

KES-EI-18T0636

Page (26) of (41)

Radiated Electric Field Emissions(Above 1 GHz)


■ AC 24 V MODE

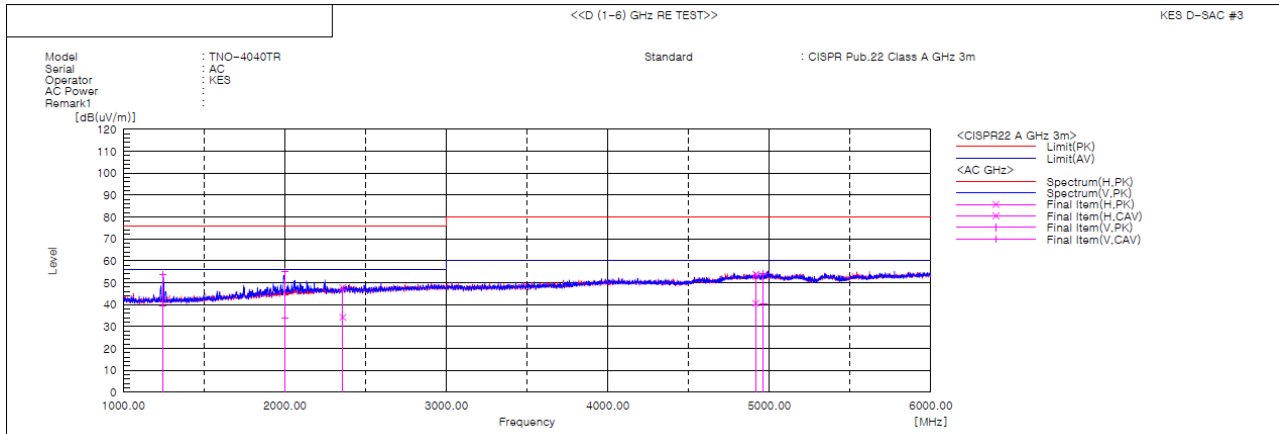

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1246.710	V	54.6	40.4	-1.0	53.6	39.4	76.0	56.0	22.4	16.6	100.0	210.0	
2	1999.189	V	51.0	30.0	3.9	54.9	33.9	76.0	56.0	21.1	22.1	100.0	2.5	
3	2358.444	H	42.2	28.8	5.5	47.7	34.3	76.0	56.0	28.3	21.7	100.0	299.1	
4	4916.399	H	39.6	26.3	14.3	53.9	40.6	80.0	60.0	26.1	19.4	100.0	342.2	
5	4963.524	V	39.6	25.9	14.4	54.0	40.3	80.0	60.0	26.0	19.7	100.0	271.2	

■ DC 12 V MODE

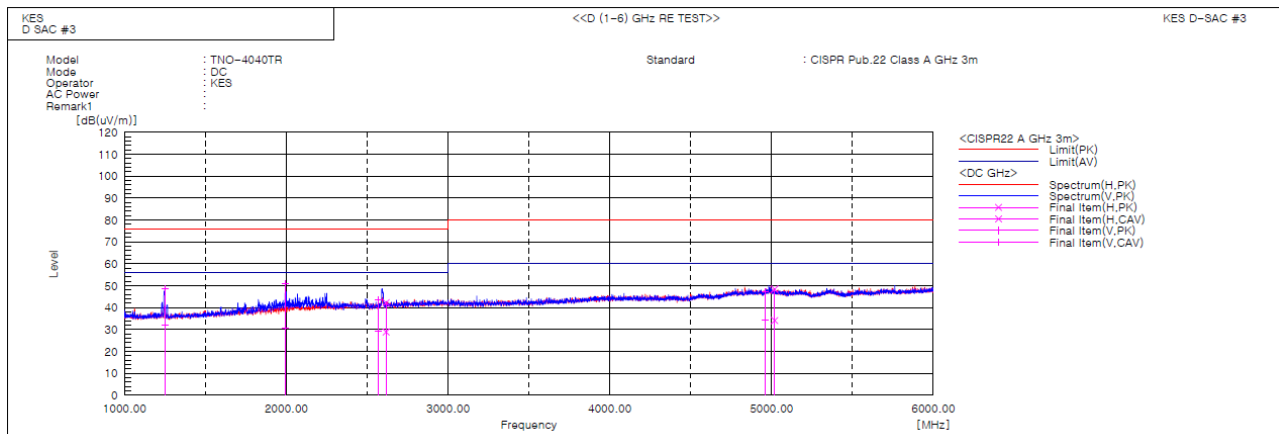

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1249.810	V	55.5	39.2	-7.0	48.5	32.2	76.0	56.0	27.5	23.8	100.0	220.4	
2	1992.850	V	53.1	32.8	-2.1	51.0	30.7	76.0	56.0	25.0	25.3	100.0	18.9	
3	2568.834	V	43.3	29.0	0.2	43.5	29.2	76.0	56.0	32.5	26.8	100.0	303.0	
4	2616.796	H	41.9	28.5	0.4	42.3	28.9	76.0	56.0	33.7	27.1	100.0	234.4	
5	4959.825	V	38.9	25.8	8.4	47.3	34.2	80.0	60.0	32.7	25.8	100.0	97.6	
6	5018.945	H	40.0	25.8	8.4	48.4	34.2	80.0	60.0	31.6	25.8	100.0	122.2	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-EI-18T0636

Page (27) of (41)

■ PoE MODE

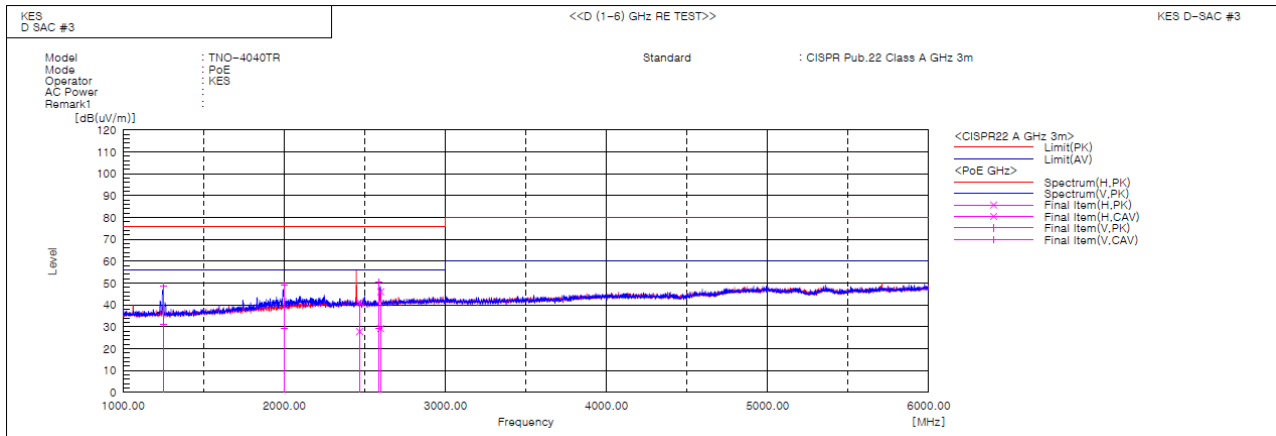

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1249.919	V	55.6	38.4	-7.0	48.6	31.4	76.0	56.0	27.4	24.6	100.0	221.3	
2	1999.069	V	51.3	31.3	-2.1	49.2	29.2	76.0	56.0	26.8	26.8	100.0	3.2	
3	2469.296	H	41.3	28.0	-0.1	41.2	27.9	76.0	56.0	34.8	28.1	100.0	273.8	
4	2598.859	H	45.8	28.9	0.3	46.1	29.2	76.0	56.0	29.9	26.8	100.0	227.3	
5	2588.132	V	50.4	29.0	0.3	50.7	29.3	76.0	56.0	25.3	26.7	100.0	62.8	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV) [dB(uV)] + c.f [dB(1/m)])

Margin(PK/CAV) [dB] = Limit [dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Voltage Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

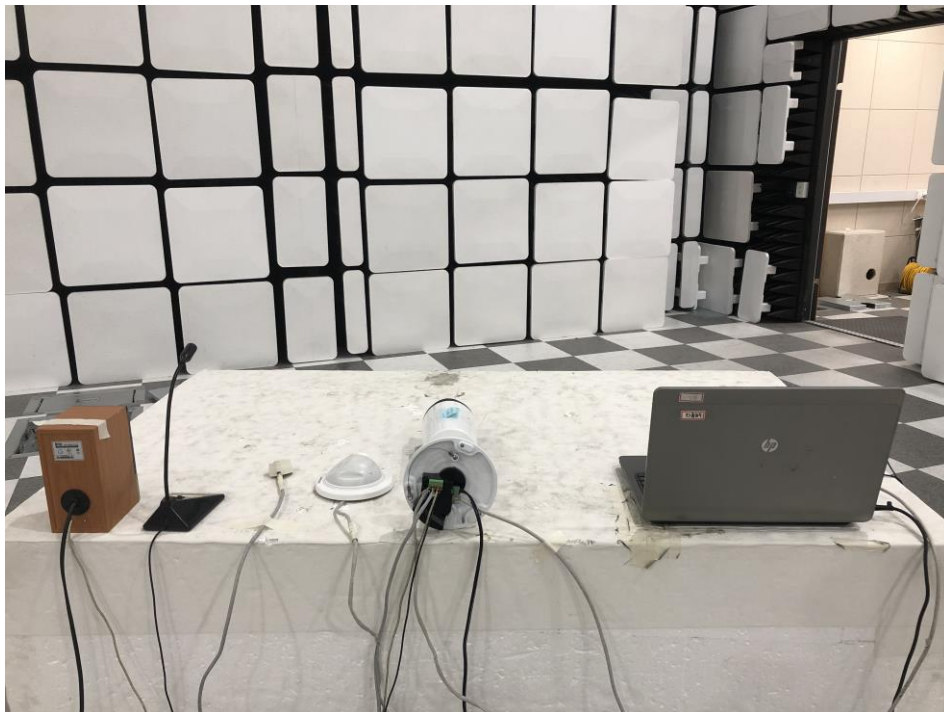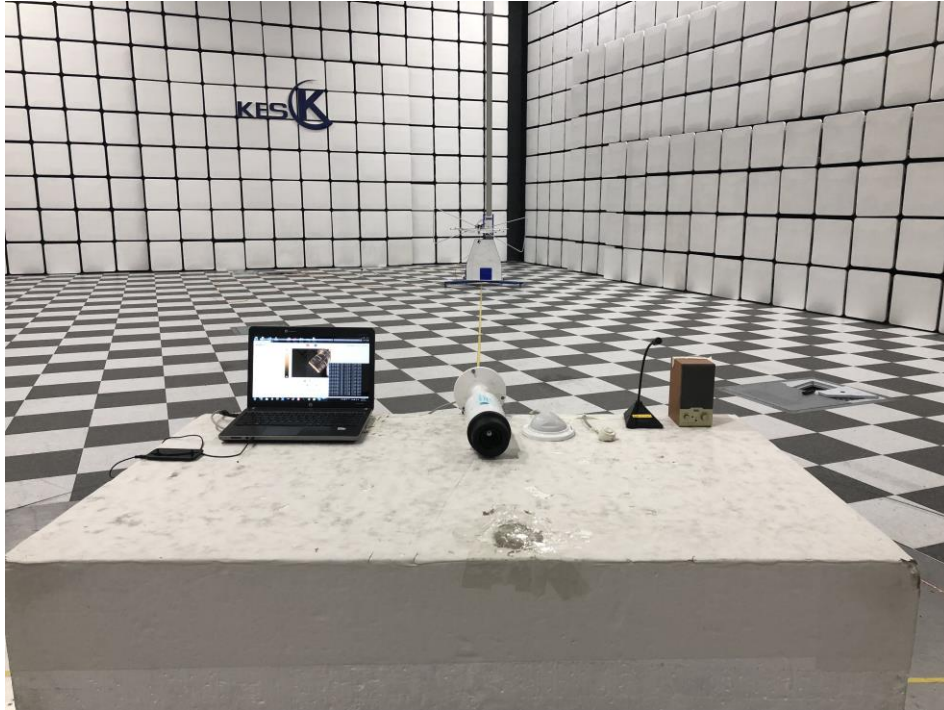

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)




(Bottom)




EUT Internal Photographs

(Internal View)

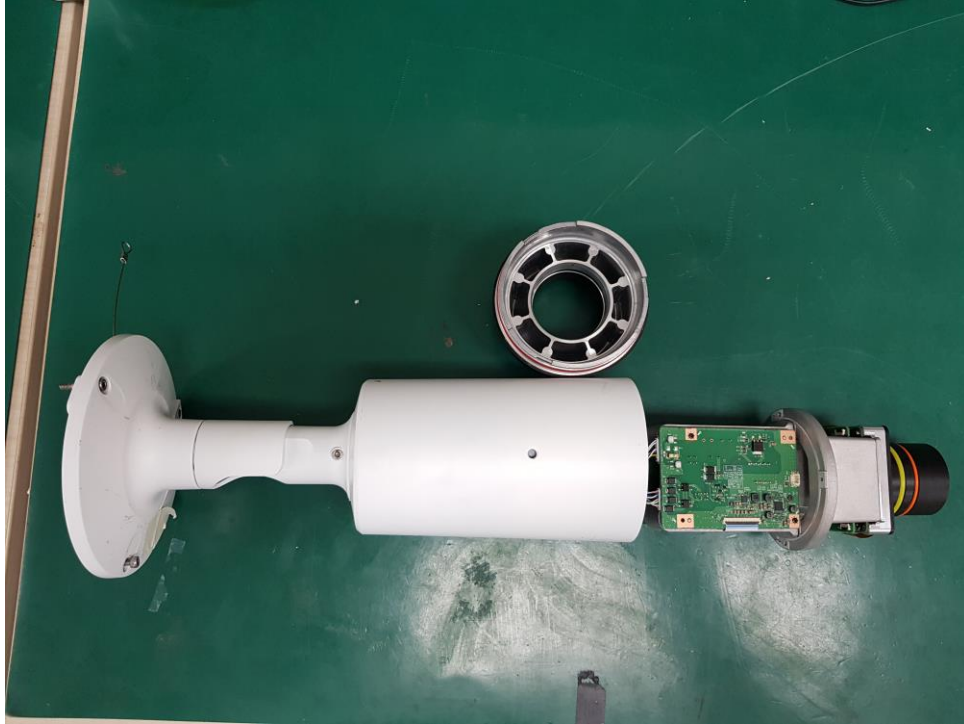

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

(Label)

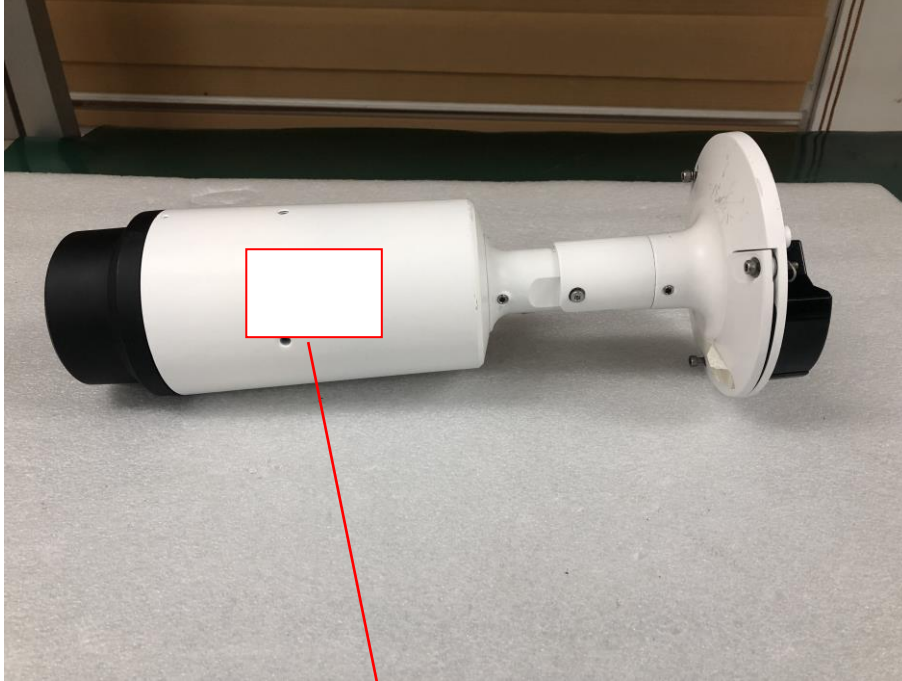

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A

EUT Internal View – Interface Board (Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


EUT Internal View – Lens
(Top)




(Bottom)

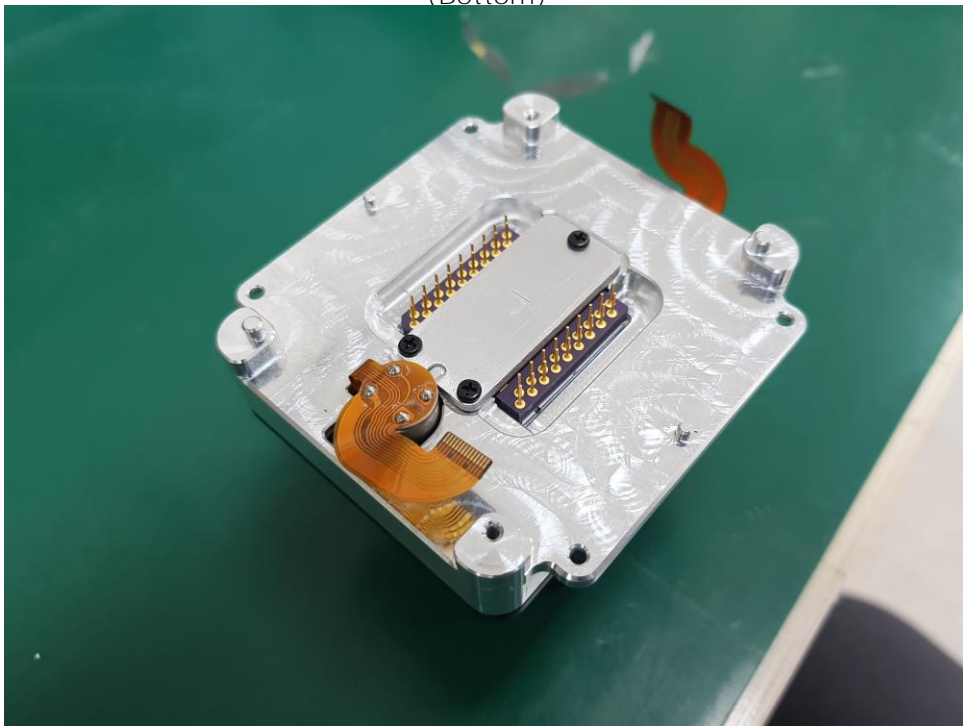

EUT Internal View – Network Board (Top)

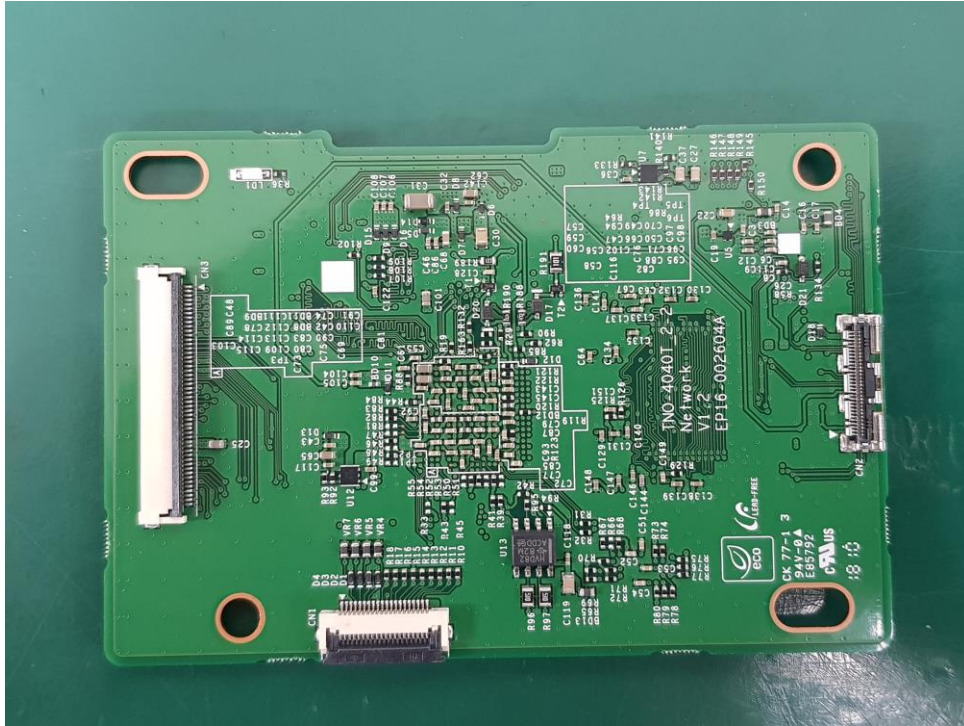

(Bottom)

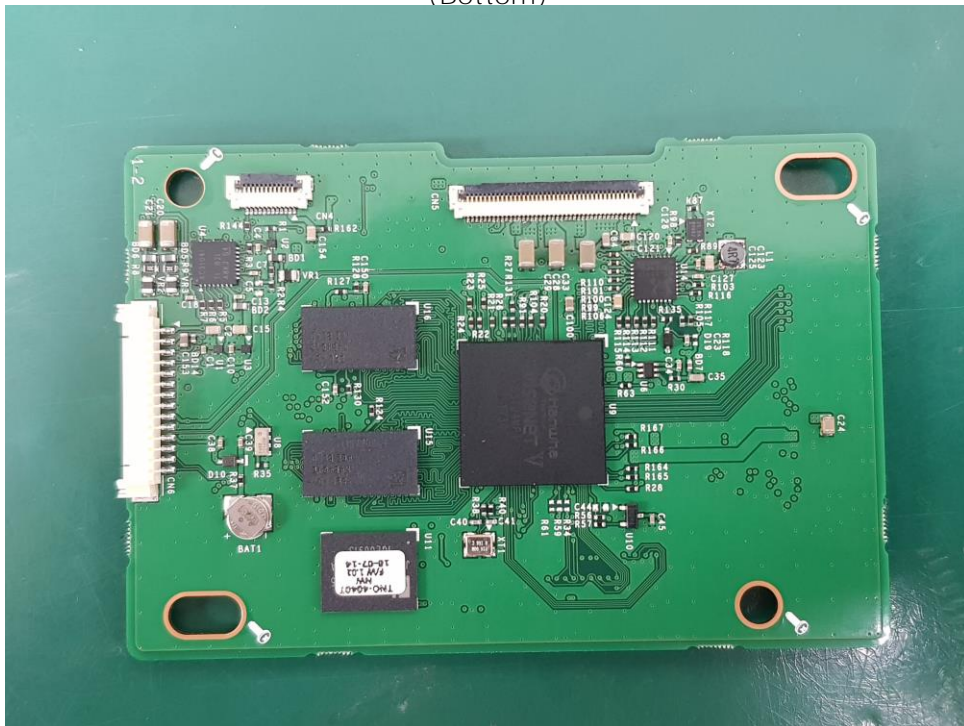

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – NUC Board (Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Power Board (Top)




(Bottom)

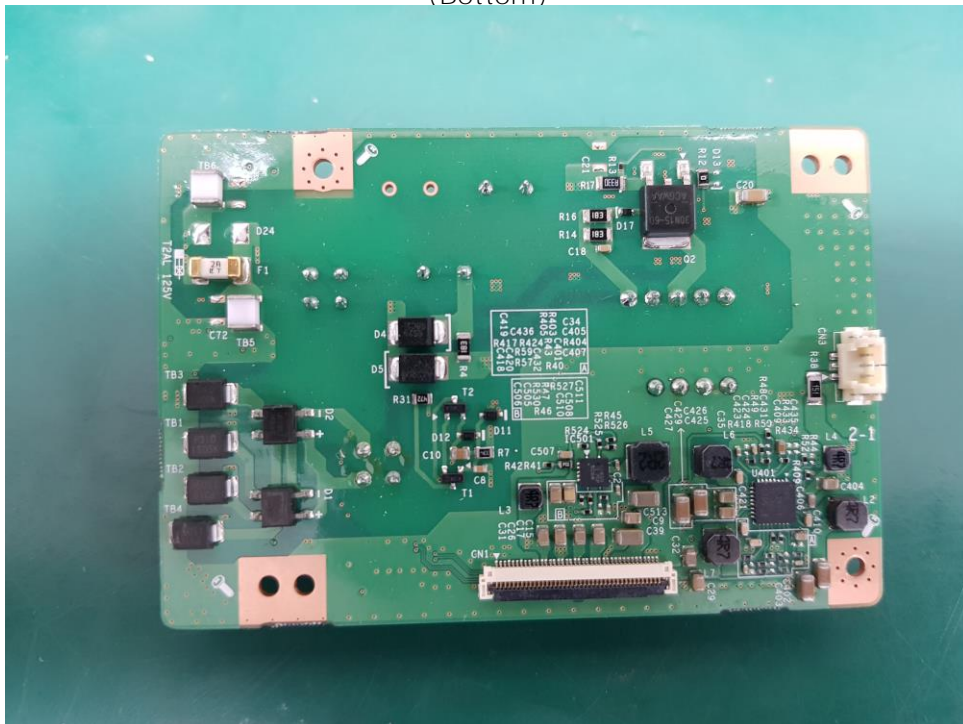


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – PRE AMP Board (Top)

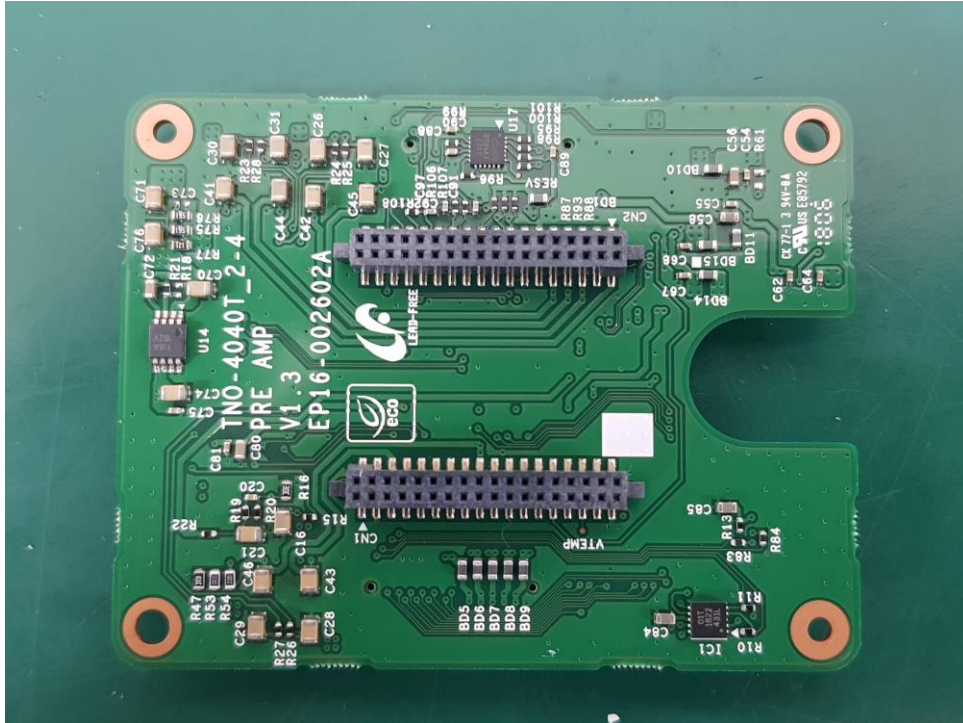

(Bottom)

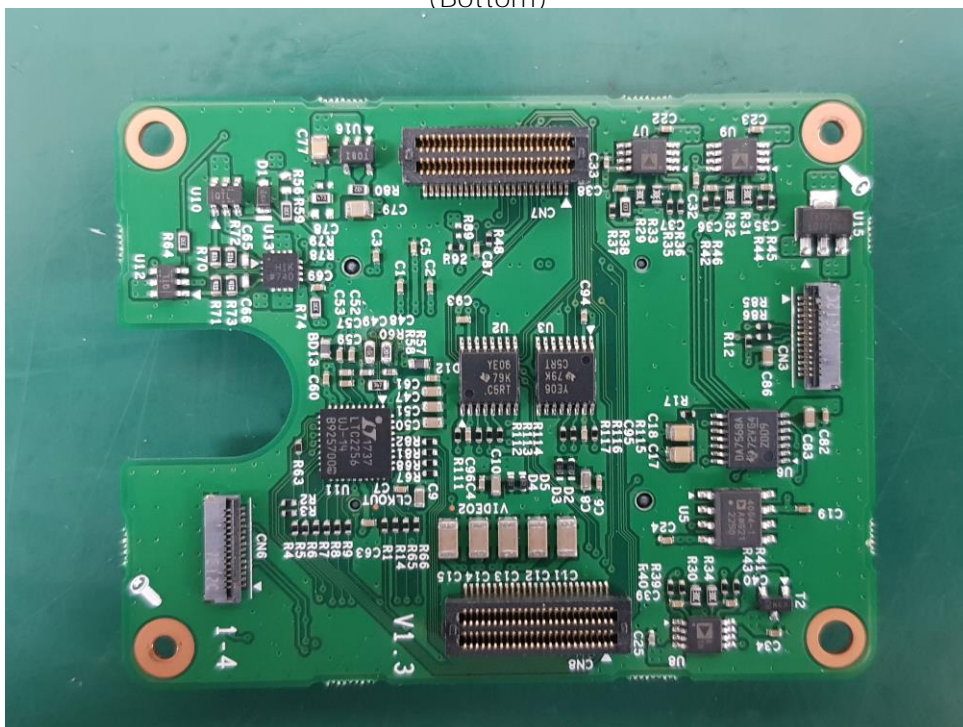


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – SD Card Board (Top)



(Bottom)

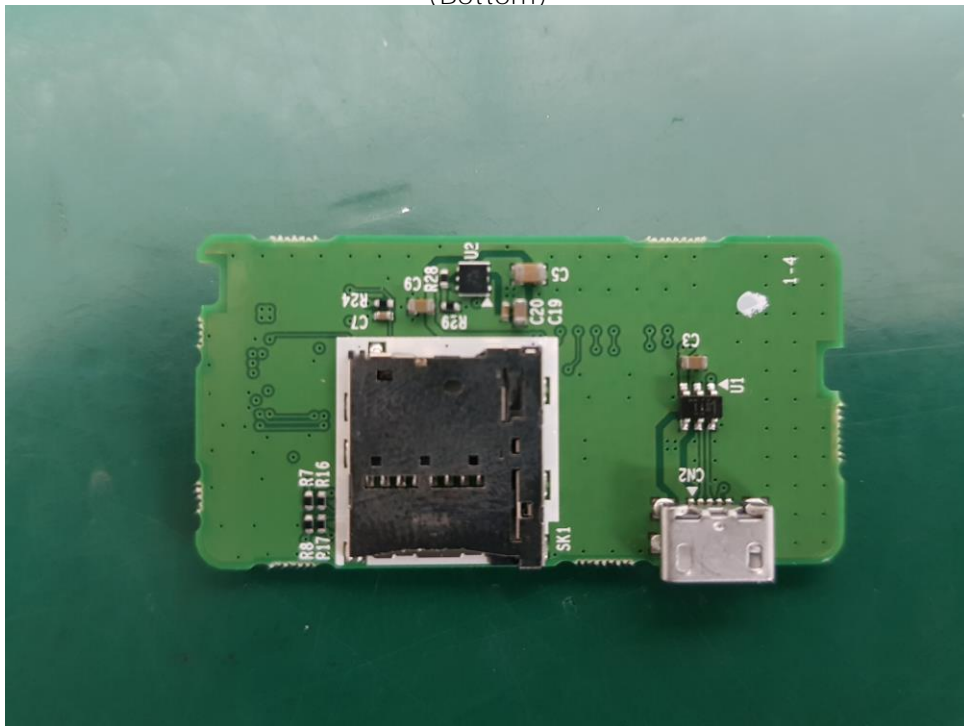

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr